



**HD 2106.1, HD 2106.2
CONDUCTIVITY METERS - THERMOMETERS**

The **HD2106.1** and **HD2106.2** are portable instruments with a large LCD display. They measure conductivity, liquid resistivity, total dissolved solids (TDS), and salinity using combined 4-ring and 2-ring conductivity/temperature probes. Temperature only is measured by Pt100 or Pt1000 immersion, penetration or contact probes.

The probe calibration can be performed automatically in one or more than one of the 147µS, 1413µS, 12880µS or 111800µS/cm conductivity calibration solutions.

The temperature probes are equipped with an automatic recognition module and factory calibration data are stored inside. The HD2106.2 is a **datalogger**. It memorizes up to 36,000 conductivity and temperature samples which can be transferred from the instrument connected to a PC via the multi-standard RS232C serial port and USB 2.0. The storing interval, printing, and baud rate can be configured using the menu. The HD2106.1 and HD2106.2 models are fitted with an RS232C serial port and can transfer to a PC the acquired measurements or to a portable printer in real time. The *Max*, *Min* and *Avg* function calculates the maximum, minimum or average values. Other functions include: the relative measurement REL, the Auto-HOLD function, and the automatic turning off which can also be excluded.

The instruments have IP67 protection degree.



HD40.1



SWD10

INSTRUMENT TECHNICAL CHARACTERISTICS

Measured quantities: χ , Ω , TDS, NaCl, °C, °F

Instrument

Dimensions (Length x Width x Height) 185x90x40mm
Weight 470g (complete with batteries)
Materials ABS, rubber
Display 2x4½ digits plus symbols
Visible area: 52x42mm

Operating conditions

Working temperature -5...50°C
Storage temperature -25...65°C
Working relative humidity 0...90%RH without condensation
Protection degree IP67

Power

Batteries 4 1.5V type AA batteries
Autonomy 200 hours with 1800mAh alkaline batteries
Power absorbed with instrument off 20µA
Mains Output mains adapter 12Vdc / 1A

Security of memorized data

Unlimited, independent of battery charge conditions

Time

Date and time Schedule in real time
Accuracy 1min/month max error

Measured values storage - model HD2106.2

Type 2000 pages containing 18 samples each
Quantity 36000 pairs of measurements [χ -°C], [Ω -°C], [TDS-°C] or [Sal-°C]
Selectable storage interval 1s, 5s, 10s, 15s, 30s, 60s (1min), 120s (2min), 300s (5min), 600s (10min), 900s (15min), 1200s (20min), 1800s (30min) and 3600s (1hour)

Serial interface RS232C

Type RS232C electrically isolated
Baud rate Can be set from 1200 to 38400 baud
Data bit 8
Parity None
Stop bit 1
Flow Control Xon/Xoff
Serial cable length Max 15m
Selectable print interval 1s, 5s, 10s, 15s, 30s, 60s (1min), 120s (2min), 300s (5min), 600s (10min), 900s (15min), 1200s (20min), 1800s (30min) and 3600s (1hour)

USB interface - model HD2106.2

Type 1.1 - 2.0 electrically isolated

Connections

Conductivity input 8-pole male DIN45326 connector
Input module for the temperature probes 8-pole male DIN45326 connector
Serial interface and USB 8-pole MiniDin connector
Mains adapter 2-pole connector (positive at centre)

Measurement of conductivity

Measuring range		Resolution
0.00...19.99µS/cm	Kcell=0.1	0.01µS/cm
0.0...199.9µS/cm		0.1µS/cm
200...1999µS/cm	Kcell=1	1µS/cm
2.00...19.99mS/cm		0.01mS/cm
20.0...199.9mS/cm		0.1mS/cm
200...1999mS/cm		1mS/cm
Measuring range		
Kcell=10		
Accuracy (conductivity)		±0.5%1digit

Measurement of resistivity

Measuring range Kcell=0.1	till 100MΩ·cm/(*)
Measuring range Kcell=1	5.0...199.9Ω·cm 200...999Ω·cm 1.00k...19.99kΩ·cm 20.0k...99.9kΩ·cm 100k...999kΩ·cm 1...10MΩ·cm
Measuring range Kcell=10	0.5...5.0Ω·cm
Accuracy (resistivity)	±0.5%±1 digit

Resolution

0.1Ω·cm
1Ω·cm
0.01kΩ·cm
0.1kΩ·cm
1kΩ·cm
1MΩ·cm
0.1Ω·cm

Temperature compensation

automatic/manual	0...100°C with α _T selectable from 0.00 to 4.00%/°C
Reference temperature	20°C or 25°C
χ / TDS Conversion factor	0.4...0.8
Cell constant K (cm ⁻¹)	0.1, 0.7, 1.0 and 10.0

Standard solutions automatically detected @25°C

147μS/cm
1413μS/cm
12880μS/cm
111800μS/cm

Measurement of total dissolved solids (with coefficient χ/TDS=0.5)

Measuring range Kcell=0.1	0.00...19.99mg/l	0.05mg/l
Measuring range Kcell=1	0.0...199.9mg/l 200...1999mg/l 2.00...19.99g/l 20.0...99.9g/l	0.5mg/l 1mg/l 0.01g/l 0.1g/l
Measuring range Kcell=10	100...999g/l	1g/l
Accuracy (conductivity)	±0.5%1 digit	

Preset cell constant values: K=0,01 - K=0,1 - K=1, K=10

K cell = 0.01 cm ⁻¹		K cell = 0.1 cm ⁻¹	
Conductivity (μS/cm)	Resistivity (MΩ·cm)	Conductivity (μS/cm)	Resistivity(MΩ·cm)
0.001 μS/cm	1000 MΩ·cm	0.01 μS/cm	100 MΩ·cm
0.002 μS/cm	500 MΩ·cm	0.02 μS/cm	50 MΩ·cm
0.003 μS/cm	333 MΩ·cm	0.03 μS/cm	33 MΩ·cm
0.004 μS/cm	250 MΩ·cm	0.04 μS/cm	25 MΩ·cm
...

Measurement of salinity

Measurement range	0.000...1.999g/l 2.00...19.99g/l 20.0...199.9g/l	1 mg/l 10mg/l 0.1g/l
Accuracy (salinity)	±0.5%1 digit	

(*) The resistivity measurement is obtained from the reciprocal of conductivity measurement. Close to the bottom of the scale, the indication of resistivity appears like reported in the table below:

Measurement of temperature

Pt100 measuring range	-50...+200°C
Pt1000 measuring range	-50...+200°C
Resolution	0.1°C
Accuracy	±0.25°C
Drift after 1 year	0.1°C/year

4 wire Pt100 and 2 wire Pt1000 Temperature probes

Model	Type	Working range	Accuracy
TP47.100	Pt100 4 wires	-50...+200°C	Class A
TP47.1000	Pt1000 2 wires	-50...+200°C	Class A
TP87.100	Pt100 4 wires	-50...+200°C	Class A
TP87.1000	Pt1000 2 wires	-50...+200°C	Class A

Temperature drift @20°C 0.005%/°C



ORDER CODES

HD2106.1: The kit is composed of: instrument HD2106.1, 4 1.5V alkaline batteries, operating manual, case and DeltaLog9 software.

HD2106.2: The kit is composed of: instrument HD2106.2 **datalogger**, 4 1.5V alkaline batteries, operating manual, case and DeltaLog9 software.

Conductivity probes, temperature probes, standard calibration solutions, cables for data transfer to PC or printer have to be ordered separately.

HD2110CSNM: 8-pole connection cable MiniDin - Sub D 9-pole female for RS232C.

C.206: Serial connection cable with USB connector for PC and 8-pole MiniDin male connector for the instrument

HD2101/USB: Connection cable USB 2.0 connector type A - 8-pole MiniDin (not suitable for HD2106.1K).

DeltaLog9: Software for download and management of the data on PC using Windows 98 to Vista operating systems.

SWD10: Stabilized power supply 100-240 Vac/12Vdc-1A mains voltage

HD40.1: 24-column portable thermal printer, serial interface, 57mm paper width, four NiMH 1.2V rechargeable batteries, SWD10 power supply, instruction manual, 5 thermal paper rolls.

RCT: The kit includes 4 thermal paper rolls 57mm wide and 32mm in diameter.

BAT-40: Spare battery pack for HD40.1 printer with built-in temperature sensor.

HD22.2: Laboratory electrode holder composed of base plate with built-in magnetic stirrer, shaft and replaceable electrode holder. Suitable diameter 12mm. Powered by bench-top meters of the series HD22...with cable HD22.2.1 (optional) or power supplier SWD10 (optional).

HD22.3: Laboratory electrode holder composed of base plate. Flexible arm for free positioning. Suitable for electrodes with diameter 12mm.

Standard conductivity calibration solutions

HD8747: Standard calibration solution 0.001mol/l equal to 147 μ S/cm @25°C, 200cc.

HD8714: Standard calibration solution 0.01mol/l equal to 1413 μ S/cm @25°C, 200cc.

HD8712: Standard calibration solution 0.1mol/l equal to 12880 μ S/cm @25°C, 200cc.

HD87111: Standard calibration solution 1mol/l equal to 111800 μ S/cm @25°C, 200cc.

Temperature probes complete with SICRAM module

TP87: Pt100 sensor immersion probe. Stem \varnothing 3 mm, length 70 mm. Cable length 1 m.

TP4721.0: Pt100 sensor immersion probe. Stem \varnothing 3 mm, length 230 mm. Cable length 2 m.

TP473P0: Pt100 sensor penetration probe. Stem \varnothing 4mm, length 150 mm. Cable length 2 m.

TP474C.0: Pt100 sensor contact probe. Stem \varnothing 4mm, length 230mm, contact surface \varnothing 5mm. Cable length 2 m.

TP475A.0: Air probe, sensor Pt100. Stem \varnothing 4mm, length 230mm. Cable length 2 m.

TP4721.5: Immersion probe, sensor Pt100. Stem \varnothing 6mm, length 500 mm. Cable length 2 m.

TP4721.10: Immersion probe, sensor Pt100. Stem \varnothing 6mm, length 1,000mm. Cable length 2 m.

Temperature probes without SICRAM module

TP87.100: Pt100 sensor immersion probe. Probe's stem \varnothing 3mm, length 70mm. 4 wire connection cable with connector, length 1 m.

TP87.1000: Pt1000 sensor immersion probe. Probe's stem \varnothing 3mm, length 70mm. 2-wire connection cable with connector, length 1 m.

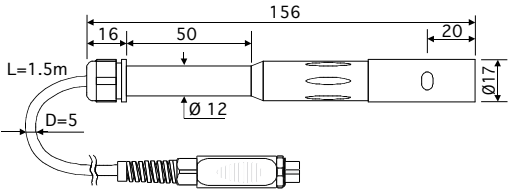
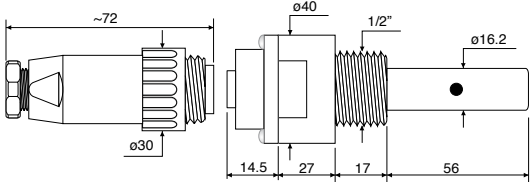
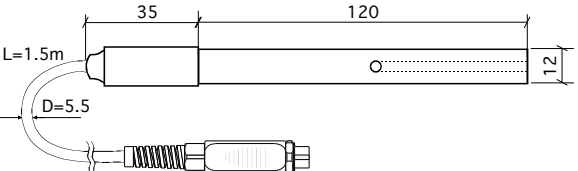
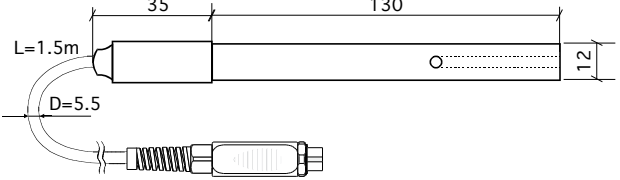
TP47: Module for the connection of Pt100 4-wire and Pt1000 2-wire probes

Conductivity probes

Please see the order codes reported in the probes' technical specifications.

TECHNICAL DATA OF PROBES AND MODULES EQUIPPED WITH INSTRUMENT

2 and 4 electrode conductivity probes

ORDER CODE	MEASUREMENT RANGE	DIMENSIONS
SP06T	K=0.7 5 μ S...200mS/cm 0...90°C 4-electrode cell in Pocan/Platinum	
SPT 400.001 not suitable for HD 2306.0	K=0.01 0,05...19,9 μ S/cm 2-electrode cell AISI 316 - Teflon	
SPT01G	K=0.1 0.1 μ S...500 μ S/cm 0...80°C 2-electrode cell in Glass/Platinum	
SPT1G	K=1 10 μ S...10mS/cm 0...80°C 2-electrode cell in Glass/Platinum	
SPT10G	K=10 500 μ S...200mS/cm 0...80°C 2-electrode cell in Glass/Platinum	